




THERMOCOUPLE EXTENSION CABLE
Individual/Overall Shield Served Wire Armor
UL Listed 300 Volt PVC Insulated 221°F (105°C)

Applications

- Petrochemical Plants
- Utilities and Industrial Plants
- Thermocouple Circuits
- Suitable for Direct Burial and ...Suspension Applications
- For use in NEC Article 725 ...Class 1 Division 2 Hazardous ...Locations
- Complies with NEC 725 for ...use in Class 2 and Class 3 ...Circuits

Product Features


- UL Listed Subject 13 PLTC
- Rated 105C 300 Volt
- Flame Retardant
- Passes IEEE 383 Flame Test
- Passes VW-1 Flame Test
- Available as Type ITC
- Resists Rodent and Mechanical Abuse
- Excellent Longitudinal Strength
- Sunlight Resistant

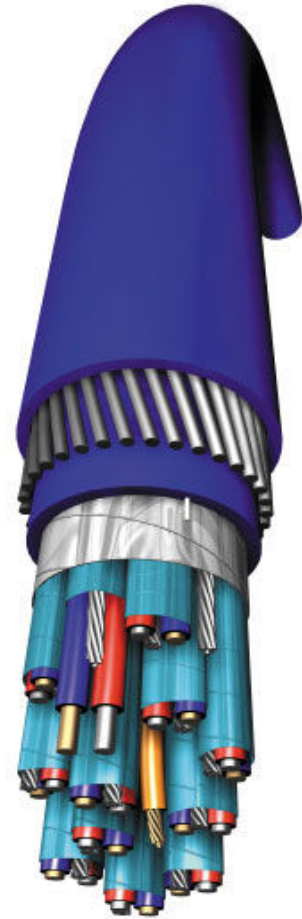

Product Specifications

Conductors:	Solid or stranded thermocouple extension wire per ASTM E230 & ANSI MC96.1 12 to 22 AWG (2.44 to .63MM)
Insulation:	Nominal .016" (.40MM) flame retardant PVC
Color Code:	Per ASTM E230 & ANSI MC96.1, numbered on positive conductor (other colors available)
Construction:	Twisted pairs
Individual Shield:	.00135" (.03MM) aluminum/polyester tape, 25% overlap
Pair Drain Wire:	22 AWG (.61MM) 7-strand tinned copper
Communication Wire:	22 AWG (.61MM) 7-strand copper insulated with nominal .015" (.38MM) orange PVC (4 pair and larger)
Cable Shield:	.002" (.05MM) aluminum/polyester tape, 25% overlap
Cable Drain Wire:	20 AWG (.91MM) 7-strand tinned copper
Inner Jacket:	Flame retardant PVC with ripcord under jacket
Armor:	Galvanized steel served wire, 80% nominal coverage
Outer Jacket:	Flame retardant PVC with ripcord under jacket

Ordering Code

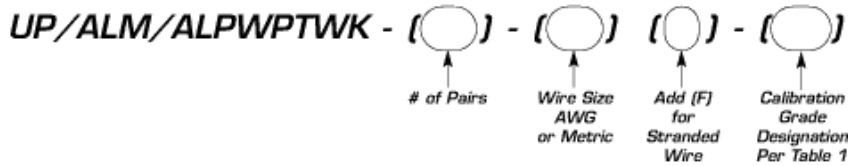

(Call for CSA Data)

Inner/Outer

Wire Size	Numbers of Pairs	Jacket Thickness		Outer Diameter		Bend Radius		Pull Tension		Net Weight	
		inches	(MM)	inches	(MM)	inches	(MM)	LB	KG	LB/MF	KG/KM
16 AWG (1.29MM) Solid	2	.053 (1.35)	.064 (1.63)	.660 (16.8)	7.9 (201)	7.9 (201)	206 (94)	292 (434)			
	4	.053 (1.35)	.064 (1.63)	.732 (18.6)	8.8 (223)	8.8 (223)	317 (144)	377 (560)			
	8	.064 (1.63)	.074 (1.88)	.952 (24.2)	11.4 (290)	11.4 (290)	602 (274)	658 (979)			
	12	.064 (1.63)	.074 (1.88)	1.107 (28.1)	13.3 (337)	13.3 (337)	913 (415)	917 (1364)			
	16	.074 (1.88)	.074 (1.88)	1.219 (31.0)	14.6 (372)	14.6 (372)	1138 (517)	1108 (1648)			
	20	.074 (1.88)	.085 (2.16)	1.354 (34.4)	16.2 (413)	16.2 (413)	1464 (665)	1415 (2105)			
	24	.074 (1.88)	.085 (2.16)	1.466 (37.2)	17.6 (447)	17.6 (447)	1717 (780)	1630 (2425)			
	36	.085 (2.16)	.085 (2.16)	1.619 (41.1)	19.4 (493)	19.4 (493)	2338 (1063)	2079 (3093)			
18 AWG (1.02MM) Solid	2	.053 (1.35)	.053 (1.35)	.584 (14.8)	7.0 (178)	7.0 (178)	151 (68)	219 (326)			
	4	.053 (1.35)	.064 (1.63)	.681 (17.3)	8.2 (208)	8.2 (208)	244 (111)	317 (472)			
	8	.064 (1.63)	.064 (1.63)	.863 (21.6)	10.4 (263)	10.4 (263)	459 (209)	533 (792)			
	12	.064 (1.63)	.074 (1.88)	.993 (25.2)	11.9 (303)	11.9 (303)	618 (281)	689 (1025)			
	16	.064 (1.63)	.074 (1.88)	1.103 (28.0)	13.2 (336)	13.2 (336)	847 (385)	895 (1332)			
	20	.074 (1.88)	.074 (1.88)	1.191 (30.3)	14.3 (363)	14.3 (363)	1012 (460)	1053 (1566)			
	24	.074 (1.88)	.085 (2.16)	1.347 (34.2)	16.2 (411)	16.2 (411)	1288 (585)	1352 (2011)			
	36	.074 (1.88)	.085 (2.16)	1.462 (37.1)	17.5 (446)	17.5 (446)	1729 (786)	1683 (2505)			
20 AWG (0.81MM) Solid	2	.042 (1.07)	.053 (1.35)	.532 (13.5)	6.4 (163)	6.4 (163)	122 (55)	182 (271)			
	4	.053 (1.35)	.064 (1.63)	.644 (16.4)	7.7 (196)	7.7 (196)	195 (89)	280 (416)			
	8	.053 (1.35)	.064 (1.63)	.791 (20.1)	9.5 (242)	9.5 (242)	355 (161)	445 (662)			
	12	.064 (1.63)	.074 (1.88)	.931 (23.6)	11.2 (283)	11.2 (283)	481 (218)	597 (888)			
	16	.064 (1.63)	.074 (1.88)	1.033 (26.2)	12.4 (315)	12.4 (315)	666 (303)	779 (1159)			
	20	.064 (1.63)	.074 (1.88)	1.095 (27.8)	13.1 (334)	13.1 (334)	771 (350)	872 (1298)			
	24	.074 (1.88)	.074 (1.88)	1.203 (30.6)	14.4 (367)	14.4 (367)	896 (407)	1012 (1506)			
	36	.074 (1.88)	.085 (2.16)	1.364 (34.6)	16.4 (416)	16.4 (416)	1317 (599)	1424 (2119)			

The products referenced above represent the most popular constructions. Other constructions can be manufactured to meet individual specification and application requirements. Contact factory for additional information.

Table 1

Initial Calibration Tolerances Per ASTM E230 and ANSI MC96.1

Thermocouple Type	Temperature Range F(C)	Grade Designation	Tolerance-Reference Junction 32F (0C)		
			Standard Grade Limits F(C)	Grade Designation	Special Grade Limits F(C)
Extension Wire					
TX	32 (0) to 212 (100)	TX	±1.8 (1)	TTX	±0.9 (0.5)
JX	32 (0) to 400 (200)	JX	±4 (2.2)	JJX	±2 (1.1)
EX	32 (0) to 400 (200)	EX	±3.1 (1.7)	EEX	±1.8 (1)
KX or NX	32 (0) to 400 (200)	KX or NX	±4 (2.2)	KKX or NNX	±2 (1.1)
Compensating Extension Wire					
RX or SX	32 (0) to 400 (200)	RX or SX	±9 (5)		

Electrical Characteristics

Insulation passes 3000 V ac spark test per UL Subject 13.
Completed cable passes a dielectric test of 2500 V dc for 10 seconds, conductor to conductor and conductor to shield, per UL Subject 13.



TE Wire & Cable LLC

107 North Fifth Street
Saddle Brook, NJ 07663-6167
Toll Free: 888-483-9473
Tel: 201-845-9400
Fax: 201-291-1190



A Marmon Wire & Cable/Berkshire Hathaway Company